



US LUBE

US LUBE SOLUBLE CUTTING OIL

US LUBE Soluble Cutting Oil is a water-soluble metalworking fluid formulated with fragrance that forms a very stable emulsion when mixed with water at a wide range of dilutions. The stability of this emulsion is not affected by hard water ions and the fact that it does not foam makes it ideal for high-speed metal working operations. The high heat absorbing characteristics of US LUBE Soluble Cutting Oil provides superior cooling for a variety of metalworking processes.

US LUBE Soluble Cutting Oil is fortified with biocides to prevent rancidity caused by bacteria, which can lead to unpleasant odors, split emulsions and reduced product performance. This feature results in greater worker satisfaction and optimum product performance. US LUBE Soluble Cutting Oil also provides excellent protection against rust.

US LUBE Soluble Cutting Oil is recommended for light to moderate duty machining operations on all ferrous and non-ferrous metals except magnesium. It will find use in machining, sawing, drilling, milling and turning. It is ideal for grinding due to its superior wetting and cooling properties.

Typical dilution ratios with water range from 1:10 for milling and turning to 1:40 for grinding.

APPLICATIONS / BENEFITS

- ▣ Protects against rust and corrosion.
- ▣ Non-foaming.
- ▣ Excellent wetting and cooling capabilities.
- ▣ Resists bacterial attack.
- ▣ Formulated with perfume for pleasant working environment.


TYPICAL CHARACTERISTICS

TEST DESCRIPTION	METHOD	TYPICAL RESULTS
Appearance		Amber
Specific Gravity		0.89
Emulsion:		
Appearance		Milky
pH at 3%		9.5
IP 287 Corrosion Test %		2.0



US LUBE

Defoam ml (2% to 50 ppm water)		Nil
Refractometer Factor		1.0

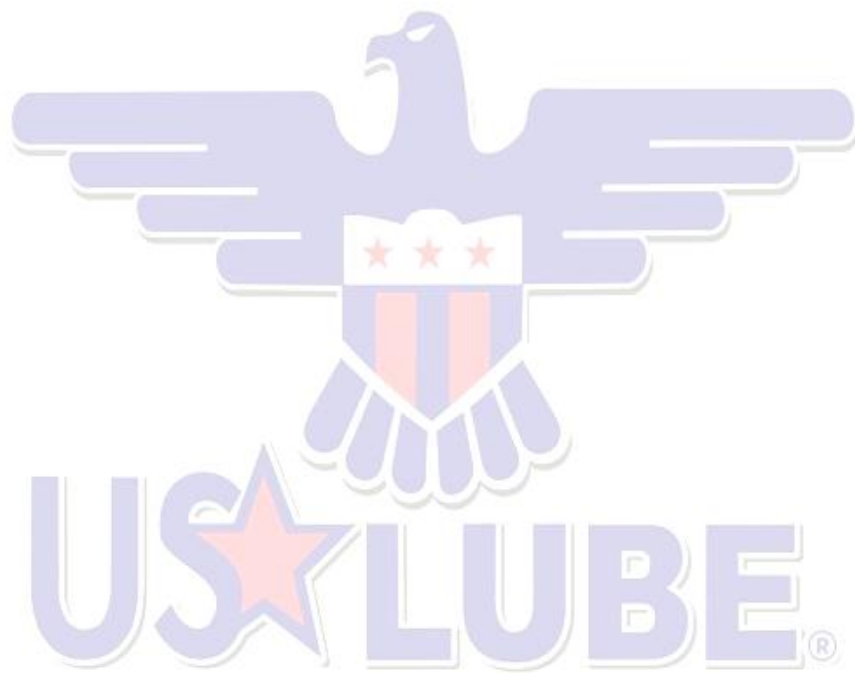

THE AMERICAN TECHNOLOGY

Product Data Sheet

Furnishing the information contained herein does not constitute a representation by US Lube that any product or process is free from patent infringement claims of any third party nor does it constitute the granting of a license under any patent of US Lube or any third party. US Lube assumes no liability for any infringement which might arise out of the product. The information and suggestions for use and application presented herein represent the best information available to us and believed to be reliable. They should not, however, be construed as controlling suggestions, and users urged to conduct confirmatory test to determine final suitability for their specific end uses. US Lube warranty only that its products meet the specifications which it sets for them and specifically DISCLAIMS ALL OTHER WARRANTIES relating to the products and the application thereof, EXPRESS or IMPLIED including but not limited to warranties of MERCHANTABILITY and FITNESS.